

PART NUMBER SSR-307-47






PRODUCT LINE SumoSprings **VARIATION** Solo

COLOR Black



BOX DESCRIPTION TAPE MACHINE POSITION Medium SumoSpring Box #20 // 18" (45.72cm) **BOX NUMBER** 512509

BILL OF MATERIALS

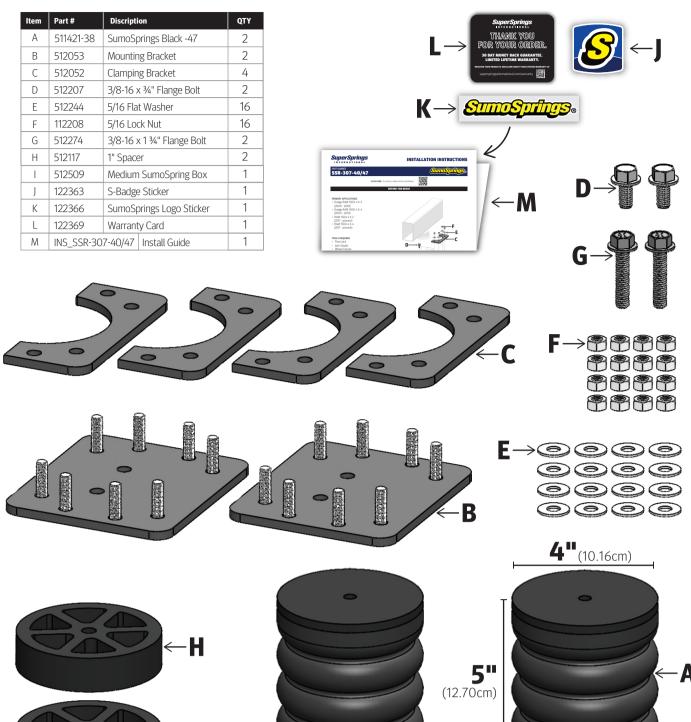

TOOLS REQUIRED

> Handheld drill

> Air hose/compressed air

- Heat sealer > Protectant cleaner 8" (20.32cm) Plastic tubing > Microfiber towel
- Metal ruler > Filler paper machine 3/8-16" Drill bit > Filler paper

Protective gloves

Safety glasses

All of the following steps that are highlighted in yellow require you to wear protective gloves and

BEFORE YOU BEGIN

PLEASE NOTE

safety glasses to complete.

1. Print or retrieve one set of installation instructions per kit. Always use the current, approved, document revision.

PACKING INSTRUCTIONS

- 2. Fold instructions in half, placing the warranty card and stickers within the folded document. Set them aside.
- 3. Locate and review components needed to build kit as listed in the Bill of Materials section. **4.** Start by building the kit box according to the Box Guide.
- **5.** Retrieve the 8" (20.32cm) wide plastic tubing to create a small bag for kit accessories.
- \downarrow HEAT SEAL 2 \downarrow HEAT SEAL 3 7. Inside the bag place: **HEAT SEAL 1** Section 1:

6. Using the heat sealer, set the heat settings at #4. Measure the roll to 6" (15.24cm), press sealer arm down across the plastic roll for 2 seconds to create a sealed closure (HEAT SEAL 1). Press the cut button to release the roll,


~ 4" (10.16cm) C x4 (HEAT SEAL 2)

Section 2: ~ 2" (5.08cm) D x2, E x16, F x16, and G x2

bag aside.

(DIAGRAM C).

creating a bag.

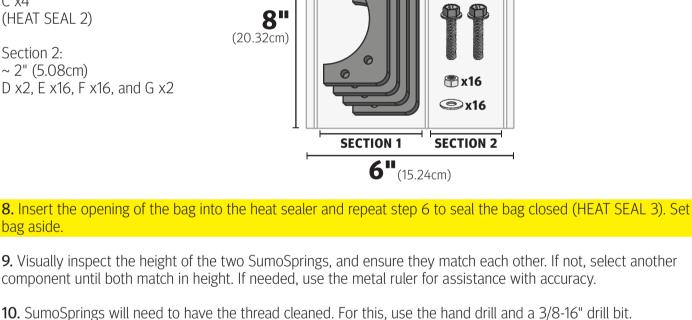

11. On the hand drill, turn drill speed to the #1.

12. Place the 3/8-16" drill bit into the thread of the SumoSpring approximately 3/4" to 1" (1.91 - 2.54cm). Thread is located at the top center of the SumoSpring component. Turn drill on until the glue and plastic are removed from the


thread. Approximate drill time is 2 to 5 seconds. Once complete, make sure the drill is turned off in a secure location. 13. Using the air hose, or compressed air, clean off the SumoSprings for any residue left over from drilling. Place the

air hose, or compressed air, back in its secure location.

15. Retrieve the filler paper machine and carefully release and cut 45" (114.30cm) of filler paper to wrap two part B brackets (refer to diagrams below). With the paper on the table put the first bracket down with the threads up, then

take the top of the paper and cover the top of the first bracket, place the second bracket on top of the first with the threads down and the paper in between (DIAGRAM A). Take the bottom of the paper and wrap it around both brackets (DIAGRAM B). Fold the ends of the paper on each side down and under the brackets to secure them

14. Using a microfiber towel and a small amount of protectant cleaner, wipe clean the SumoSprings of any dust or

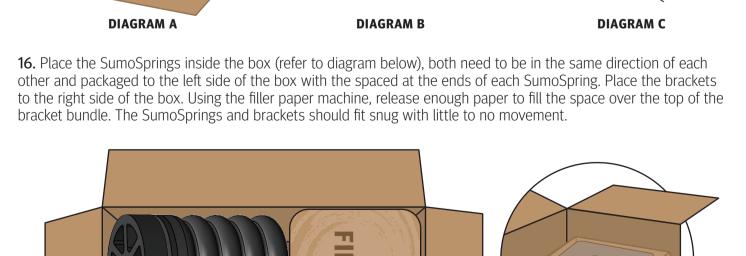



- **18.** Retrieve the installation instructions packet, which **COMPLETED KIT** should contain the warranty card and SSI sticker, and
- referenced in the Box Guide. 20. Using the scanner (refer to scanner instructions) print

19. Close the top of the box by completing the steps

place it on top of the components in the box.

- out a label. 21. Position label vertically, on the left side of the end of
- the box with the SuperSprings International logo side to the left (refer to Completed Kit Diagram).

22. Place the finished kit in the applicable bin.

TEM: SSR-307-4

COMPLETED KIT WEIGHT 13lbs (8.89 kg.)

SSI BUILDER GUIDE SSR-307-47 **REV: 1.0 | FEB 2023**